

## Possible issues


- The arm clamps may not hold the arms firmly in position. Tighten them more!
- The clamp jaws may bind. Ensure that the jaws are parallel.
- The cross-dowels in the handles may come loose. Apply white glue and re-insert.
- The sliders may bind. Try loosening the clamps.

If you have any problems or suggestions, please contact Fabrikisto at [contact@stitchingstands.com](mailto:contact@stitchingstands.com)

**Thank you!**

# Fabrikisto Stitching Frame Stands

## Double-sided Stitching Frame Stand

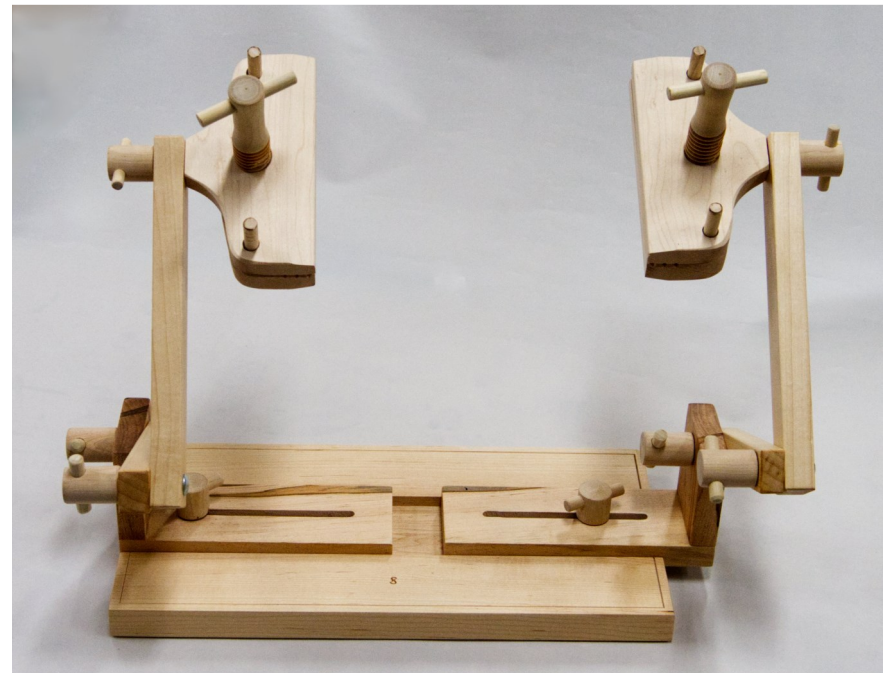

## Description

A versatile, well-made two-sided stand and support to hold your stitching project while you work hands-free! With a solid Maple base that's 25 mm (1") thick and 20 x 40 cm / 8 x 16" deep and wide, it's stable. Whether you prefer to set it on a table or on your lap, this 3 kg stand will hold your work securely. Either of the arms may be used separately, or combined to give full flexibility of placement.

For transport, the parts may be disassembled, or simply folded flat. Loosening the arm bolts makes it easier to fold the arms.

The arms may be mounted either inside the uprights of the sliders, or outside for a greater span. With both arm sets inside, the minimum span is 100 mm (4"). With both arm sets on the outside, the maximum span is 500 mm (20").

## Assembly and Usage

Assembly is simple and easily repeatable. Please use the photo as a guide during assembly. **Please read these instructions completely before proceeding!**

1. Choose whether to use a single arm on both sides, and if so, which one. The shorter ones are 15 cm (6") and the longer ones are 25 cm (10")
2. If you choose to use both side arms, determine whether the shorter or longer will be attached to the base.
3. Remove the knob from the first arm's bolt, insert the bolt in the hole in one of the verticals, and reattach the knob. Note that the arm may be placed on either side of the vertical. Ensure that the knob isn't cross-threaded on the bolt. If it does not turn freely, back it off and try again. **Do not cross-thread!**
4. Repeat with the other arm or arms.

5. Remove the knob from a clamp, insert the bolt in the upper hole of an arm, then re-attach the knob, ensuring it is not cross-threaded.
6. Repeat with the other clamp.
7. Adjust the sliders by loosening the knob(s), adjusting for fit, and tightening the slider knobs.
8. Mount your frame, hoop, or stretcher bars as desired. Note that the clamp knob has a reverse thread – turn anti-clockwise (as seen from the top) to tighten.
9. Tighten all knobs to ensure your work stays in place.
10. For transport, loosen all knobs and lay the arms and clamps flat against the base. Re-tighten knobs so things stay in place.